



For the Finest in Residential, Farm and Commercial Buildings



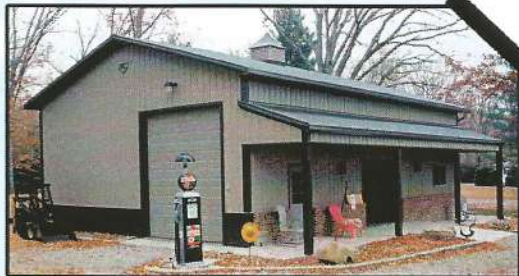

60X104X18

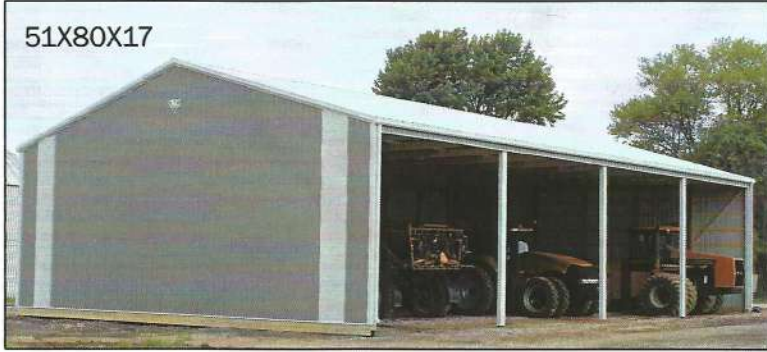

51X80X17



42X48X10



80X80X17

Colors in this brochure are for illustration purposes and may vary from actual color and finish.



66X112X16



36X40X14




60X56X18, 20X10X18



30X40X9



80X240X20

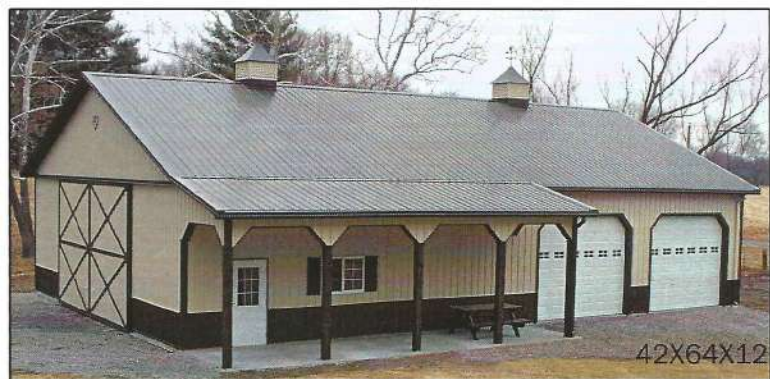


R.C. Buildings Standard Clear Span Widths:
 24-27-30-32-36-42-45-48-51-54-60-66-72-80
 Truss and Post Spacing Standard 8' oc.
 Various Heights Available 8' thru 20'



Limited Warranty
 50 Year CCA Treated Timbers
 40 Year Paint Warranty
 10 Year Edge Rust Warranty
 30 Year Fade and Chalk
 40 Year Powder Coated Screws
 Life of Structure Snowload
 5 Year Roof Leak



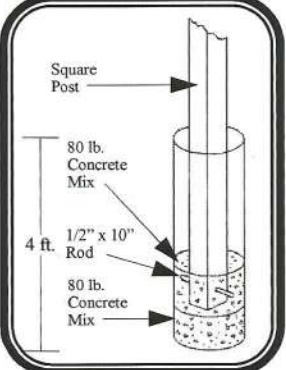

Post Anchor
 16" Diameter Holes
 4' Deep from Level Grade
 80#'s of 5,000# Concrete Mix for Pad.
 80#'s of 5,000# Concrete Mix for Anchor.
 Total of 160#'s used. Buildings wider than 60' have an additional 80#'s added.



6x6 Treated Post Grade #2 and Better
 Yellow Pine 6x6 Posts are Kiln Dried before Treating, this allows Treatment to follow the Grain of Wood from Ends of Post for 100% Penetration of Sapwood. Minimum of .60 CCA Pressure Treatment. No Splices. 6x6's have 5 1/2 more square inches of wood than 3-2x6's, that is 22% more.



#1 Yellow Pine
 All #1 Yellow Pine Lumber used throughout building. Stronger, holds fasteners better.

Corner Braces #1 YP
 Standard at each corner.
2x4 Wall Girts #1 YP
 Wall Girts 24" Spacing



2x4 Strip Sheathing #1 YP
 2x4 Strip Sheathing on top of trusses. 24" Spacing. Lapped one foot at splices.

2x6 Eave Boards #1 YP


Post Notch
 6x6 Posts are notched for direct support of Truss. Truss is nailed and Bolted.

Knee Brace #1 YP
 Double 2x4 Knee Braces are used for additional strength.



Trusses
 D.S.S. and M.S.R. Lumber. Straight Bottom Chord is Standard. Allows full clearance throughout building. Minimum 32# per sq ft Roof Load 8' oc. Standard Truss Spacing 8' oc.

End Wall Post
 End wall posts go to top of end wall for additional strength.



Optional Concrete Foundation
 Concrete foundation with 4X6 Treated Plate and U-Post Brackets.



Plasti-Sleeve Post Protectors Optional
 A one piece molded plastic sleeve with an enclosed bottom designed to fit post cleanly. Made from a high quality HDPE plastic which has an in-ground decay resistance of hundred's of years. Protects against post rot, decay or insect attack. Length 5' 6"



2-Piece Sliding Door Center
 Center Door Guide on a 6x6 post buried in the center of the door opening with concrete. All components are made of heavy steel. 2-piece Door Centers are 2-ply 2x4's for added Strength.



Sliding Door Stay
 Prevents door from closing on its own while open.

Sliding Door Jamblatch
 7-inch hook and powerful cam-action pulls the door securely against the jamb. Eliminates rattling and wind damage. Opens inside only.



Sliding Door Bottom Guide
 Door rolls easy.. No binding or catching on the smooth, mated surfaces.

2x6 Center Match
 2 Rows of Treated #1 Yellow Pine 2x6 Center Match Standard on Buildings.



Steel I-Beams
 Engineered Steel I-Beams used for side door headers. Full clearance side door same height as end door.




Sliding Doors
Optional Steel Door Frames
 3 1/2" Aluminum Vertical Rail and Bottom Rail Components used along with Galvanized Steel Box Girts.



Steel Walk Door
 Various Options Available

- Solid Panel
- 22x22 Lite
- 22x36 9 Lite
- 22x36 Vent Lite
- Crossbucks
- 6 Panel
- Variety of Colors



Commercial Gutter Standard

Unique Gutter goes on before roof steel. Designed to eliminate worry of snow & ice slide. Larger to carry more water. Gutter Guard is available.

Optional Thermax™ Insulation
Insulation and Condensation Control.
Fire Rated Insulation.



DripStop Condensation Control

The world leader in this type of condensation control. It has been on every continent in every climate condition across the globe. Applied directly to the panel at the factory. Advantages: Saves Money, Very Durable, Helps Fight Corrosion, No Bird Nesting Troubles, Reduces Rain Noise.



Commercial Rake and Gutter
Buildings Standard with R.C. Rake and Gutter. More attractive than plain trim used by others. Gives the appearance of a 6" overhang.

Downspout
Same Color as Siding.

Trim Package
Trim available in all colors. Lengths up to 20' long eliminating splices.

Optional Overhang
Specially Designed Trim Package
Bird tight seal at end of building.



Windows

- Horizontal Aluminum Single Pane Window Standard
- Horizontal Thermo Window
- Vertical Single Hung Thermo
- Screen is Standard
- Optional Shutters
- Optional Internal Grills



Sliding Door
Trim Colors to Match Building
Optional Crossbucks


Easy rolling track guaranteed for life of building.



Steel Roofing and Siding
R.C. Buildings uses only the best steel substrate coatings available. Painted G90 panels are one of the heaviest galvanized coated panels in the industry with the warranty to match. The panels are manufactured from the highest quality steel produced to an 80,000 psi minimum yield strength.

C.H.I. Overhead Door

Variety of Sizes, Styles and Colors
Optional Windows
Optional Operators



Cupola

Variety of sizes. Colors to match your building. Variety of weathervanes. Attractive source for additional ventilation.

Optional Vented Closure Strips



For Continuous Ventilation.



Dutch Door

Variety of colors available to match building. Jamb is formed from a single sheet of steel (no seams) for added strength and appearance. Heavy Duty Hinges are Extra Strong and Bolt into Door Panel.

The standard Valspar paint system is an advanced silicone, polyester protection coating that provides outstanding performance against the elements. In addition, the products are backed by a written 40-year Paint Finish Warranty, 10-year Edge Rust Warranty and 30-year Fade-Chalk Warranty that ensures long term beauty and durability. This extraordinary paint system is available in a wide range of color choices. Heavy 29 Gauge, 36" panel coverage and ribs on 9" center.

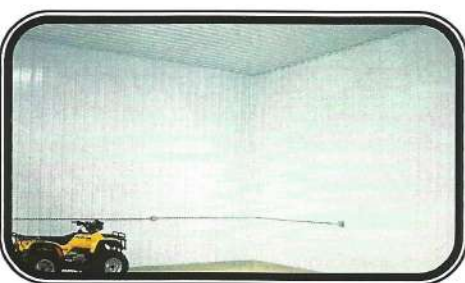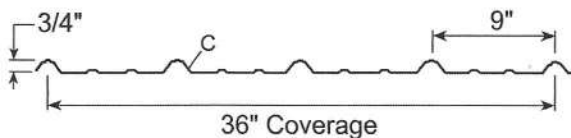

Finished Interior
Liner Panel with Optional 6" R-19 Insulated Sides and Optional 9" R-30 Insulated Ceiling
Double Framed Wall



Porch Options

Decorative Post Trim



Optional Wainscot

Mansard



Specialty Buildings



Built to Suit Your Needs!



66X168X18 & 80X88X18



80X180X22, 70X50X9, 30X20X12 Canopy




42X72X14



54X112X16 & 16X112 Lean To



70X360X16

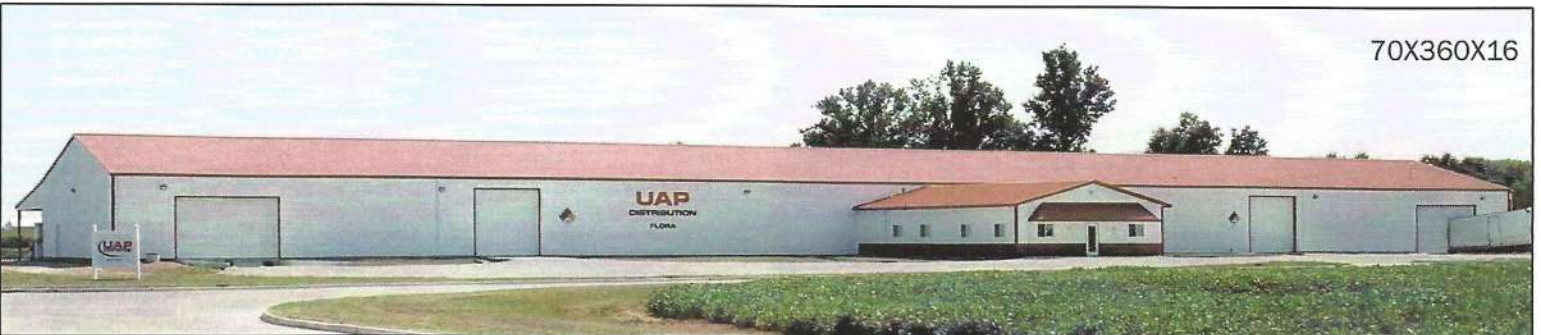

72X96X16



72X104X12



36X32X8 & 40X64X14



A Sign of Quality
Material and
Workmanship Backed
by a Written Warranty.



42X88X12



51X96X14



30X48X12




42X64X14



36X56X10



36X64X12

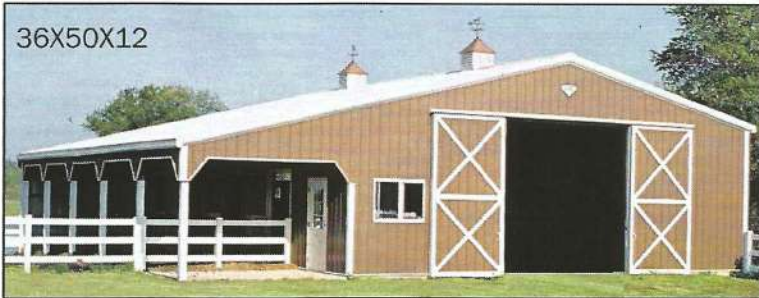

36X50X12



36X64X12



42X56X12

For a Competitive Price Contact:



(618) 466-6337
FAX 466-9395

7107 Montclair
Hwy 111
Godfrey, IL 62035

www.buildwithcountryside.com



R.C. Buildings, Inc.


PO Box 286
Altamont, IL 62411
(618) 483-5204

To See More Pictures Go To
www.rcbuildings.com




American Made Products

J MAC METALS

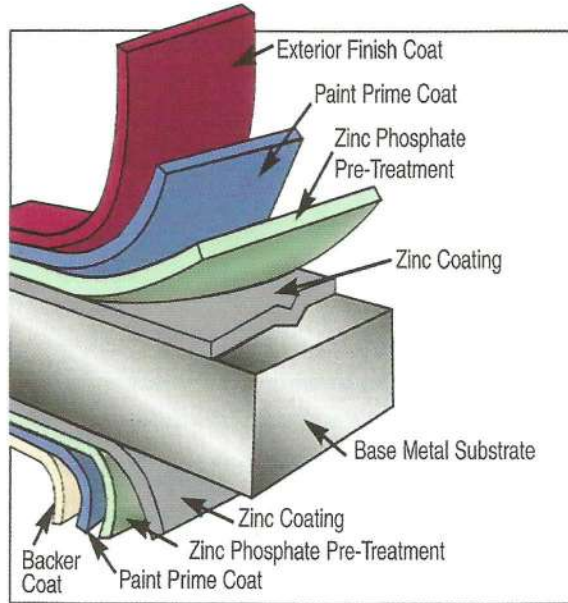

- Gauges 29 & 26
- 40 Year Paint Warranty
- 90,000 P.S.I.
- American Made Steel
- G90 Panels & Trims



Terratone

Cocoa Brown

Burnished Slate

Barn Red

American Red

Burgundy

Roman Blue

Dark Blue

Forest Green

valspar®

WeatherXL™



Also available with:



THE DRIPSTOP SOLUTION

Factory Applied Condensation Control



www.rcbuildings.com