


# For the Finest in Residential, Farm and Commercial Buildings





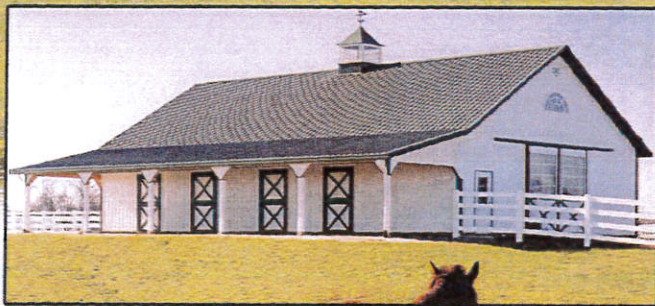


60X104X18



51X80X17



42X48X10

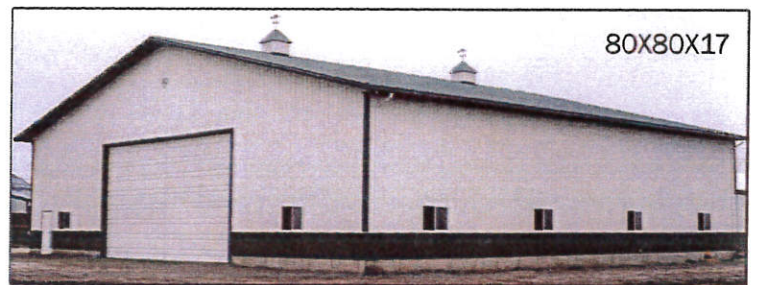

80X80X17

Colors in this brochure are for illustration purposes  
and may vary from actual color and finish.



66X112X16




36X40X14



60X56X18, 20X10X18



30X40X9

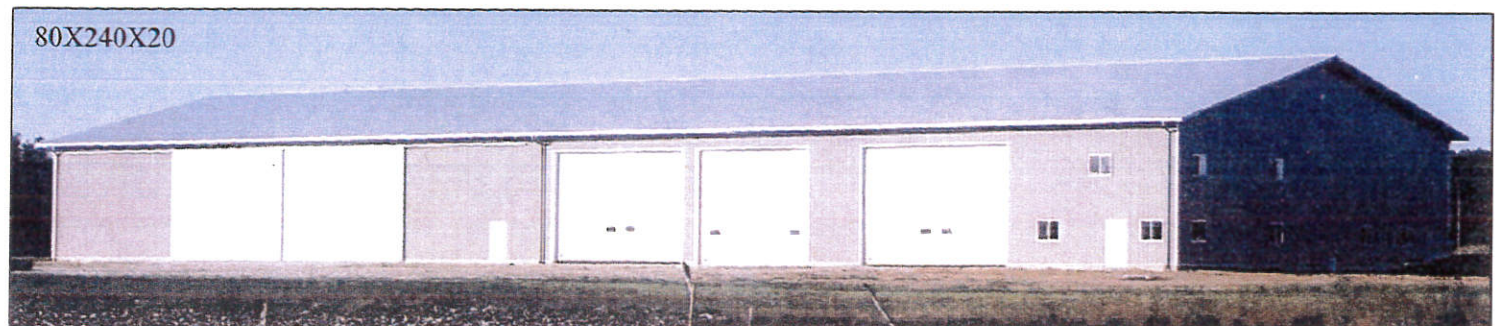

80X240X20






R.C. Buildings Standard Clear Span Widths:  
24-27-30-32-36-42-45-48-51-54-60-66-72-80  
Truss and Post Spacing Standard 8' oc.  
Various Heights Available 8' thru 20'

### Limited Warranty

- 50 Year CCA Treated Timbers
- 40 Year Paint Warranty
- 10 Year Edge Rust Warranty
- 30 Year Fade and Chalk
- 40 Year Powder Coated Screws
- Life of Structure Snowload
- 5 Year Roof Leak



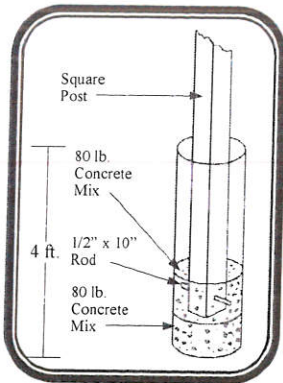

### Post Anchor

16" Diameter Holes  
4' Deep from Level Grade  
80#s of 5,000# Concrete Mix for Pad.  
80#s of 5,000# Concrete Mix for Anchor.  
Total of 160#s used. Buildings wider than 60' have an additional 80#s added.



### 6x6 Treated Post Grade #2 and Better

Yellow Pine 6x6 Posts are Kiln Dried before Treating, this allows Treatment to follow the Grain of Wood from Ends of Post for 100% Penetration of Sapwood. Minimum of .60 CCA Pressure Treatment. No Splices. 6x6's have 5 1/2 more square inches of wood than 3-2x6's, that is 22% more.



### #1 Yellow Pine

All #1 Yellow Pine Lumber used throughout building. Stronger, holds fasteners better.

### Corner Braces #1 YP

Standard at each corner.

### 2x4 Wall Girts #1 YP

Wall Girts 24" Spacing



### 2x4 Strip Sheathing #1 YP

2x4 Strip Sheathing on top of trusses. 24" Spacing. Lapped one foot at splices.

### 2x6 Eave Boards #1 YP

### Post Notch

6x6 Posts are notched for direct support of Truss. Truss is nailed and Bolted.

### Knee Brace #1 YP

Double 2x4 Knee Braces are used for additional strength.



### Trusses



D.S.S. and M.S.R. Lumber. Straight Bottom Chord is Standard. Allows full clearance throughout building. Minimum 32# per sq ft Roof Load 8' oc. Standard Truss Spacing 8' oc.

### End Wall Post

End wall posts go to top of end wall for additional strength.

### Optional Concrete Foundation

Concrete foundation with 4X6 Treated Plate and U-Post Brackets.




### Plasti-Sleeve Post Protectors Optional

A one piece molded plastic sleeve with an enclosed bottom designed to fit post cleanly. Made from a high quality HDPE plastic which has an in-ground decay resistance of hundred's of years. Protects against post rot, decay or insect attack. Length 5' 6"



### 2-Piece Sliding Door Center

Center Door Guide on a 6x6 post buried in the center of the door opening with concrete. All components are made of heavy steel. 2-piece Door Centers are 2-ply 2x4's for added Strength.



### Sliding Door Stay

Prevents door from closing on its own while open.

### Sliding Door Jamblatch

7-inch hook and powerful cam-action pulls the door securely against the jamb. Eliminates rattling and wind damage. Opens inside only.



### Sliding Door Bottom Guide

Door rolls easy.. No binding or catching on the smooth, mated surfaces.


### 2x6 Center Match

2 Rows of Treated #1 Yellow Pine 2x6 Center Match Standard on Buildings.



### Steel I-Beams

Engineered Steel I-Beams used for side door headers. Full clearance side door same height as end door.

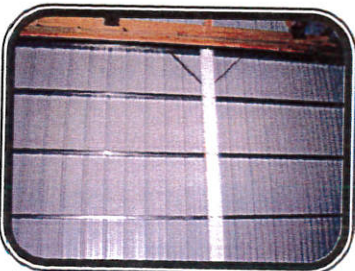

### Sliding Doors

### Optional Steel Door Frames

3 1/2" Aluminum Vertical Rail and Bottom Rail Components used along with Galvanized Steel Box Girts.




### Steel Walk Door

Various Options Available

- Solid Panel
- 22x22 Lite
- 22x36 9 Lite
- 22x36 Vent Lite
- Crossbucks
- 6 Panel
- Variety of Colors





### Commercial Gutter Standard

Unique Gutter goes on before roof steel. Designed to eliminate worry of snow & ice slide. Larger to carry more water. Gutter Guard is available.

### Optional Thermax™ Insulation

Insulation and Condensation Control. Fire Rated Insulation.



### Commercial Rake and Gutter

Buildings Standard with R.C. Rake and Gutter. More attractive than plain trim used by others. Gives the appearance of a 6" overhang.

### Downspout

Same Color as Siding.



### Trim Package

Trim available in all colors. Lengths up to 20' long eliminating splices.

### Optional Overhang



Specially Designed Trim Package. Bird tight seal at end of building.



### Steel Roofing and Siding

R.C. Buildings uses only the best steel substrate coatings available. Painted G90 panels are one of the heaviest galvanized coated panels in the industry with the warranty to match. The panels are manufactured from the highest quality steel produced to an 80,000 psi minimum yield strength.

The standard Valspar paint system is an advanced silicone, polyester protection coating that provides outstanding performance against the elements. In addition, the products are backed by a written 40-year Paint Finish Warranty, 10-year Edge Rust Warranty and 30-year Fade-Chalk Warranty that ensures long term beauty and durability. This extraordinary paint system is available in a wide range of color choices. Heavy 29 Gauge, 36" panel coverage and ribs on 9" center.

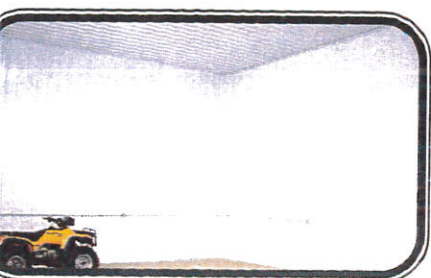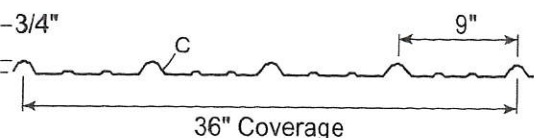

### Finished Interior

Liner Panel with Optional 6" R-19 Insulated Sides and Optional 9" R-30 Insulated Ceiling. Double Framed Wall.




### DripStop Condensation Control

The world leader in this type of condensation control. It has been on every continent in every climate condition across the globe. Applied directly to the panel at the factory. Advantages: Saves Money, Very Durable, Helps Fight Corrosion, No Bird Nesting Troubles, Reduces Rain Noise.



### Windows

- Horizontal Aluminum Single Pane Window Standard
- Horizontal Thermo Window
- Vertical Single Hung Thermo
- Screen is Standard
- Optional Shutters
- Optional Internal Grills



### Sliding Door

Trim Colors to Match Building. Optional Crossbucks.

Easy rolling track guaranteed for life of building.




### C.H.I. Overhead Door

Variety of Sizes, Styles and Colors. Optional Windows. Optional Operators.



### Cupola

Variety of sizes. Colors to match your building. Variety of weathervanes. Attractive source for additional ventilation.



### Dutch Door

Variety of colors available to match building. Jamb is formed from a single sheet of steel (no seams) for added strength and appearance. Heavy Duty Hinges are Extra Strong and Bolt into Door Panel.



### Porch Options




### Decorative Post Trim

### Optional Wainscot

### Mansard

Construction details and material specifications shown in this brochure are subject to change without notice.



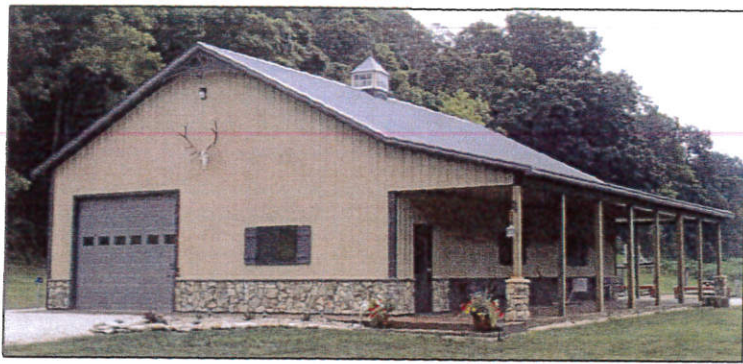

## Specialty Buildings




Built to Suit Your Needs!







66X168X18 & 80X88X18

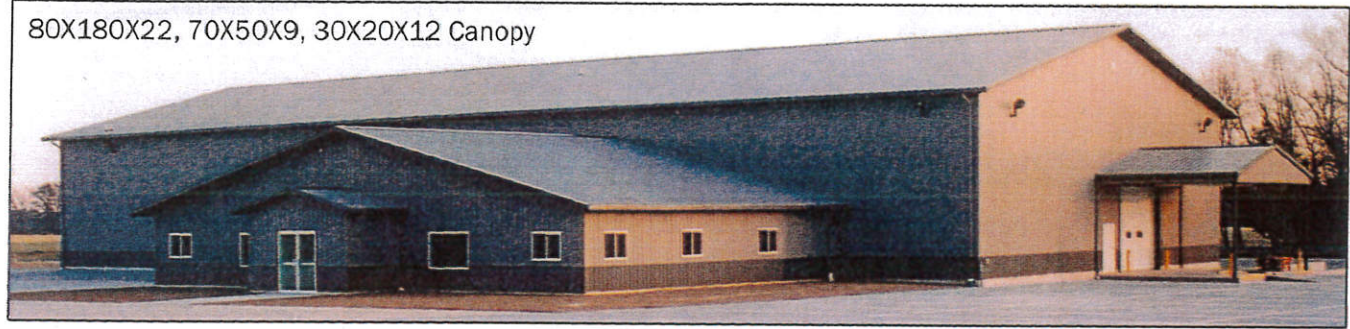

80X180X22, 70X50X9, 30X20X12 Canopy



42X72X14



54X112X16 & 16X112 Lean To



70X360X16



72X96X16



72X104X12





A Sign of Quality  
Material and  
Workmanship Backed  
by a Written Warranty.



36X32X8 & 40X64X14



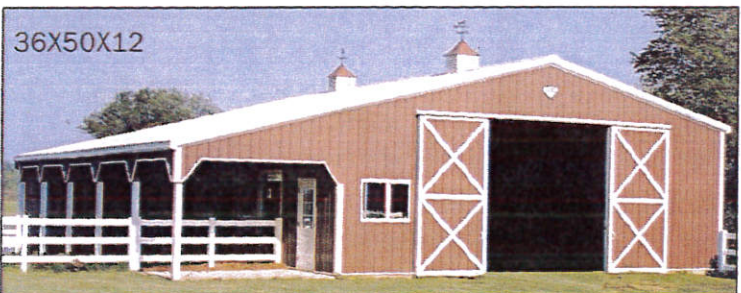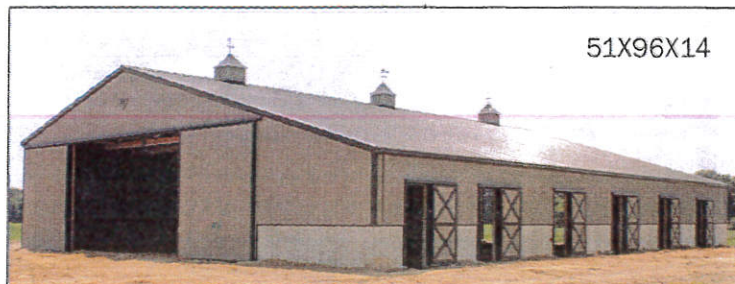

**For a Competitive Price Contact:**



(618) 466-6337  
FAX 466-9395

7107 Montclair  
Hwy 111  
Godfrey, IL 62035

[www.buildwithcountryside.com](http://www.buildwithcountryside.com)



Since 1975

**R.C. Buildings, Inc.**  
PO Box 286  
Altamont, IL 62411  
(618) 483-5204

To See More Pictures Go To  
[www.rcbuildings.com](http://www.rcbuildings.com)

American Made Products





**Black**

STANDARD | PRIME

Trim in 29 ga only.

**Charcoal**

STANDARD | PRIME | ULTRA

**Pewter**

PRIME

Trim in 29ga only.

**Gray**

STANDARD | PRIME | ULTRA

**Alamo**

STANDARD | PRIME | ULTRA

Trim in 29 ga only.

**Brilliant**

STANDARD | PRIME | ULTRA

**Forest**

STANDARD | PRIME | ULTRA

**Hunter**

STANDARD | PRIME | ULTRA

**Colony**

PRIME

Trim in 26 ga only.

**Crimson**

PRIME | ULTRA

**Rustic**

STANDARD | PRIME | ULTRA

**Burgundy**

STANDARD | PRIME | ULTRA

**Gallery**

PRIME | ULTRA

**Ocean**

PRIME | ULTRA

Trim in 29ga only.

**Ivory**

PRIME

Trim in 29 ga only.

**Light Stone**

STANDARD | PRIME | ULTRA

**Desert**

PRIME

Trim in 26 ga only.

**Taupe**


STANDARD | PRIME | ULTRA



Choose CentralGuard for the best protection  
and a lifetime warranty

# Panel-Loc Plus™

## Color Selection Tool

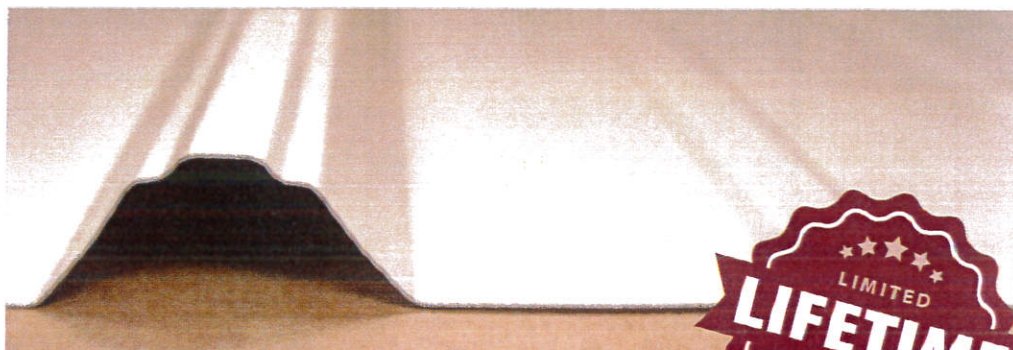
[www.centralstatesmfg.com](http://www.centralstatesmfg.com)

\*Contact your sales person for accurate pricing. † Color variation between orders is normal and not cause for rejection. ‡ Weathering and appearance variation, including color, sheen, and spangle, is common in non-painted materials and is not a cause for rejection. For consistent appearance, choose a paint-finished product.

Colors on this chart are close representations of actual metal color, limited by printing and viewing conditions. Color matching is optimized for outdoor viewing.

CHRT\_PLPL\_200101

**SHERWIN-WILLIAMS**  
Coil Coatings



Check our website to  
verify which colors meet  
ENERGY STAR® requirements  
for steep slope roofs.

### PREMIUM COLOR

Fluropon® 70% PVDF

**Copper  
Metallic\*†**  
PRIME



Clear acrylic coating

**Galvalume®‡**

STANDARD | PRIME | ULTRA



**Burnished  
Slate**

STANDARD | PRIME | ULTRA



**Brown**

STANDARD | PRIME | ULTRA



**Tan**

STANDARD | PRIME | ULTRA





# Choose CentralGuard® for the best protection and a lifetime warranty.

CentralGuard is our specific combination of everything that goes into making the highest-quality metal panels. Available on our Prime and Ultra panels, the CentralGuard name is a guarantee that you have the best protection and a lifetime paint warranty.

Choose CentralGuard for the perfect balance of fade protection, rust blocking, and dent resistance.

OUR BEST  
SELLER!

	STANDARD	<b>PRIME</b> CentralGuard	<b>ULTRA</b> CentralGuard
<b>FADE PROTECTION</b>			
Paint Warranty	40-YEAR	<b>LIFETIME</b>	<b>LIFETIME</b>
Paint Thickness	THICK .90 mil	THICKER 1.0 mil	THICKER 1.0 mil
Fade Warranty	30-YEAR	30-YEAR	30-YEAR
Fade Protection	✓	✓✓	✓✓
<b>RUST BLOCKING</b>			
Advanced Rust Blocking	–	✓	✓
Perforation Warranty	–	20-YEAR	20-YEAR
Substrate Thickness	1.12 mil	1.60 mil	1.60 mil
Substrate Coating	varies	Galvalume	Galvalume
<b>DENT RESISTANCE</b>			
Advanced Dent Resistance	–	✓	✓✓
Steel Thickness	THIN	THICK	THICKEST
Steel Gauge	29 ga.	29 ga.	26 ga.

*Panel-Loc Plus features UL2218 approval for impact resistance and may qualify for a homeowners insurance discount.  
See your local insurance agent for qualifications.*



## Visualize it on your home.

Use our color visualizer to quickly test different color combinations for your project. Upload a photo of your home, or try out some of our sample projects.



Find the color visualizer at  
[www.centralstatesmfg.com](http://www.centralstatesmfg.com)

## Panel-Loc Plus™



Copyright © 2020, Central States Manufacturing, Inc., All Rights Reserved.  
CentralGuard® is a trademark of Central States® Manufacturing, Inc.  
Galvalume® is a registered trademark of BIEC International, Inc.